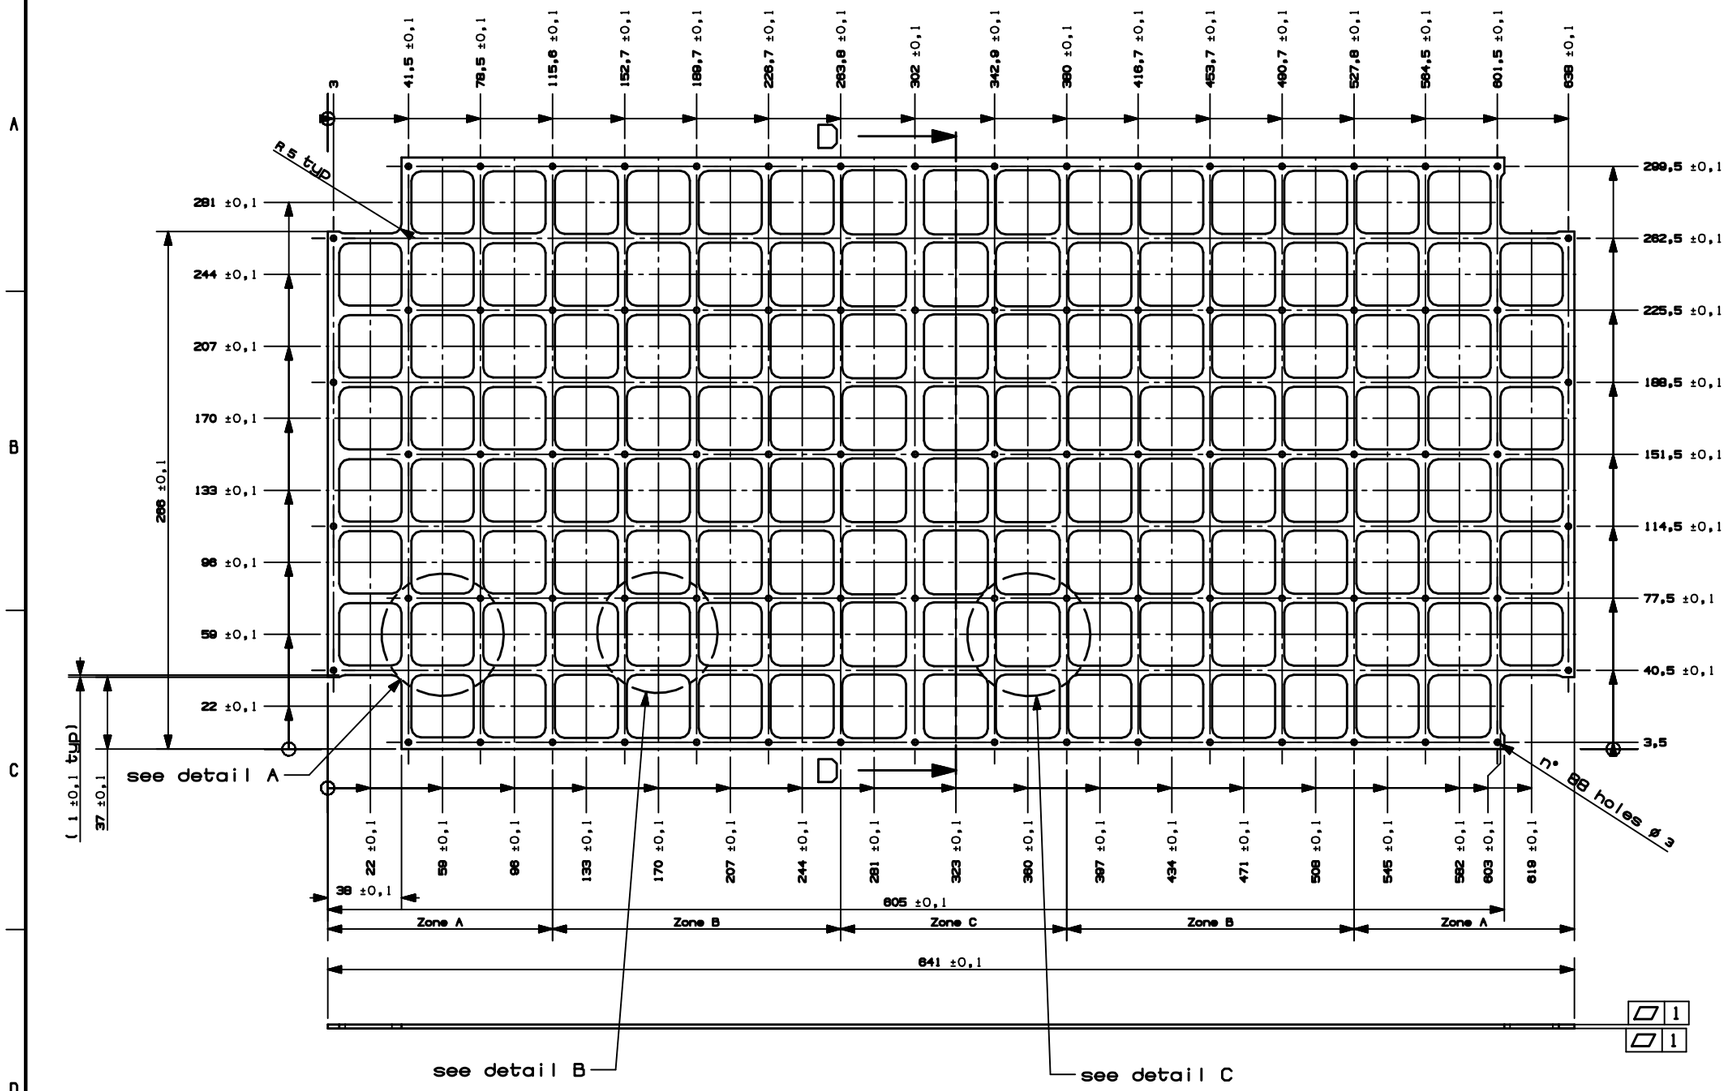

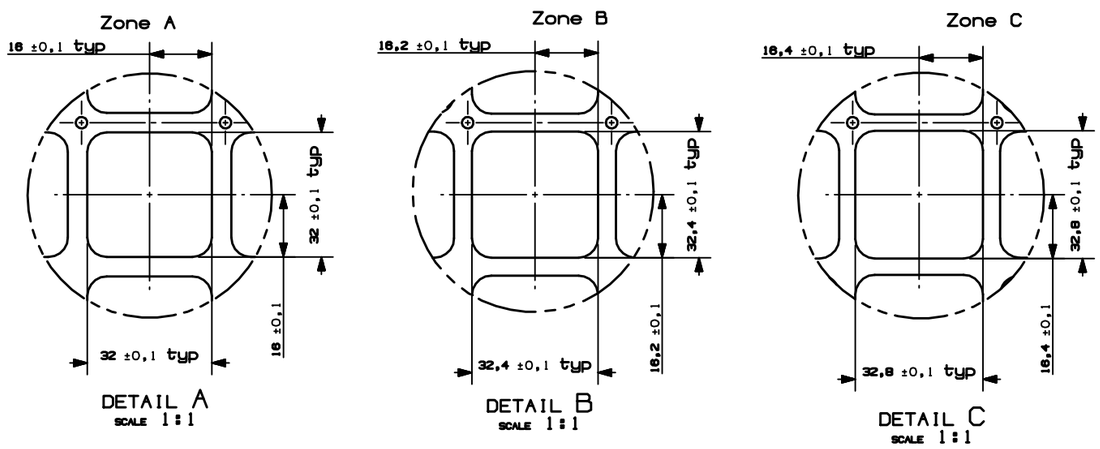

NOTES:
1. MATERIAL: ALUMINIUM ALLOY 6061 T6 SPEC QQ-A-250/11
2. NDI PER ASTM-E 1417, TYPE I, METHOD D, SENSITIVITY LEVEL 3 SHALL BE PERFORMED.
3. SURFACE TREATMENT: ALODINE PER MIL-C-5541, CLASS 3, TYPE 2. 1200 GOLD.
4. REMOVE BURRS AND BREAK SHARP EDGES WITH CHAMFER OF 0,3 X 45° ACCORDING TO DIN 6784

FILE MODEL: skin_rett_08_1_bottom.prt
FILE DRAWING: skin_bottom_Y_dwg.prt

REV	DRAWN	DATE	MEC CHECK	DATE	EL. CHECK	DATE	SYST ENG	DATE	PA	DATE	CoC	DATE	CHANGE AUTHORITY
/		09-09-2004 AM											

UNLESS OTHERWISE SPECIFIED DIMENSIONS AND TOLERANCES ARE IN mm

IDENTIFICATION MARKING PER

CARLO GAVAZZI SPACE

DRAWING TITLE

RICH SYSTEM

SKIN BOTTOM Y

SCALE 1:1

PROJECTION

GEN. TOLERANCES PER ISO 2768-m

3.2

CARLO GAVAZZI

DASH NUMBER: 12-RICSYS-30.000

NEXT ASSY

APPLICATION

SIZE A2

CAGE CODE

DRAWING NUMBER 12-RICSYS-30.004

REV

SHEET 1 OF 1

THIS IS A CAD DRAWING NO MANUAL ALTERATION

ALL RIGHTS RESERVED - COPYRIGHT ACC. TO DIN 34